




# 120 Palm Size DMM

- Measure line and control circuit voltages.
- Measure resistance of motor windings, transformers and solenoids.
- Make general AC and DC voltage and resistance measurements.
- Measure the resistance of elements and electric heater cores.
- Test continuity of wiring
- Verify voltage at breakers and outlets.
- Use as a back-up meter in your tool box.

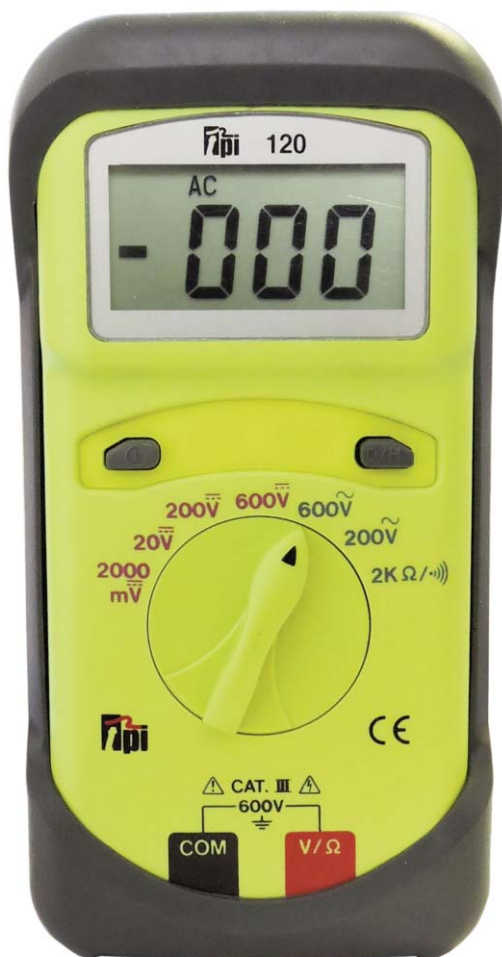

- Safety: meets CE, ITC 1010 requirements; UL listed
- Large 4,000 Count Display
- 0 to 600 Volts AC and DC
- 10M Ohm impedance

- Auto Power Off After 10 Minutes
- Includes Test Lead Set, Batteries and Protective Rubber Boot
- 3 Year Limited Warranty




**120 Comes Complete With:** (2) A002 1.5V Battery, A040 Test Lead Set, A101 Rubber Boot

**120** shown with standard A101 tilt stand protective boot

<b>Range Selection</b>	
Manual	•
<b>Display Specifications</b>	
2000 Count Display	•
<b>Basic Functions</b>	
AC / DC Volts	•
Resistance	•
Audible Continuity	•
<b>Additional Functions</b>	
Data Hold	•
<b>Additional Features</b>	
Protective Boot	•
<b>Range &amp; Resolution</b>	
Basic DC Accuracy	0.5%
DC Voltage	600V
Input Impedance	10MΩ
Resolution (maximum)	1mV
AC Voltage	600V
Input Impedance	10MΩ
Resolution (maximum)	1mV
Resistance	2KΩ
Resolution (maximum)	0.001KΩ
<b>Agency Approval</b>	
CE IEC 61010	CAT II 1000V / CAT III 600V /
cULus 61010	•



# 120 Palm Size DMM

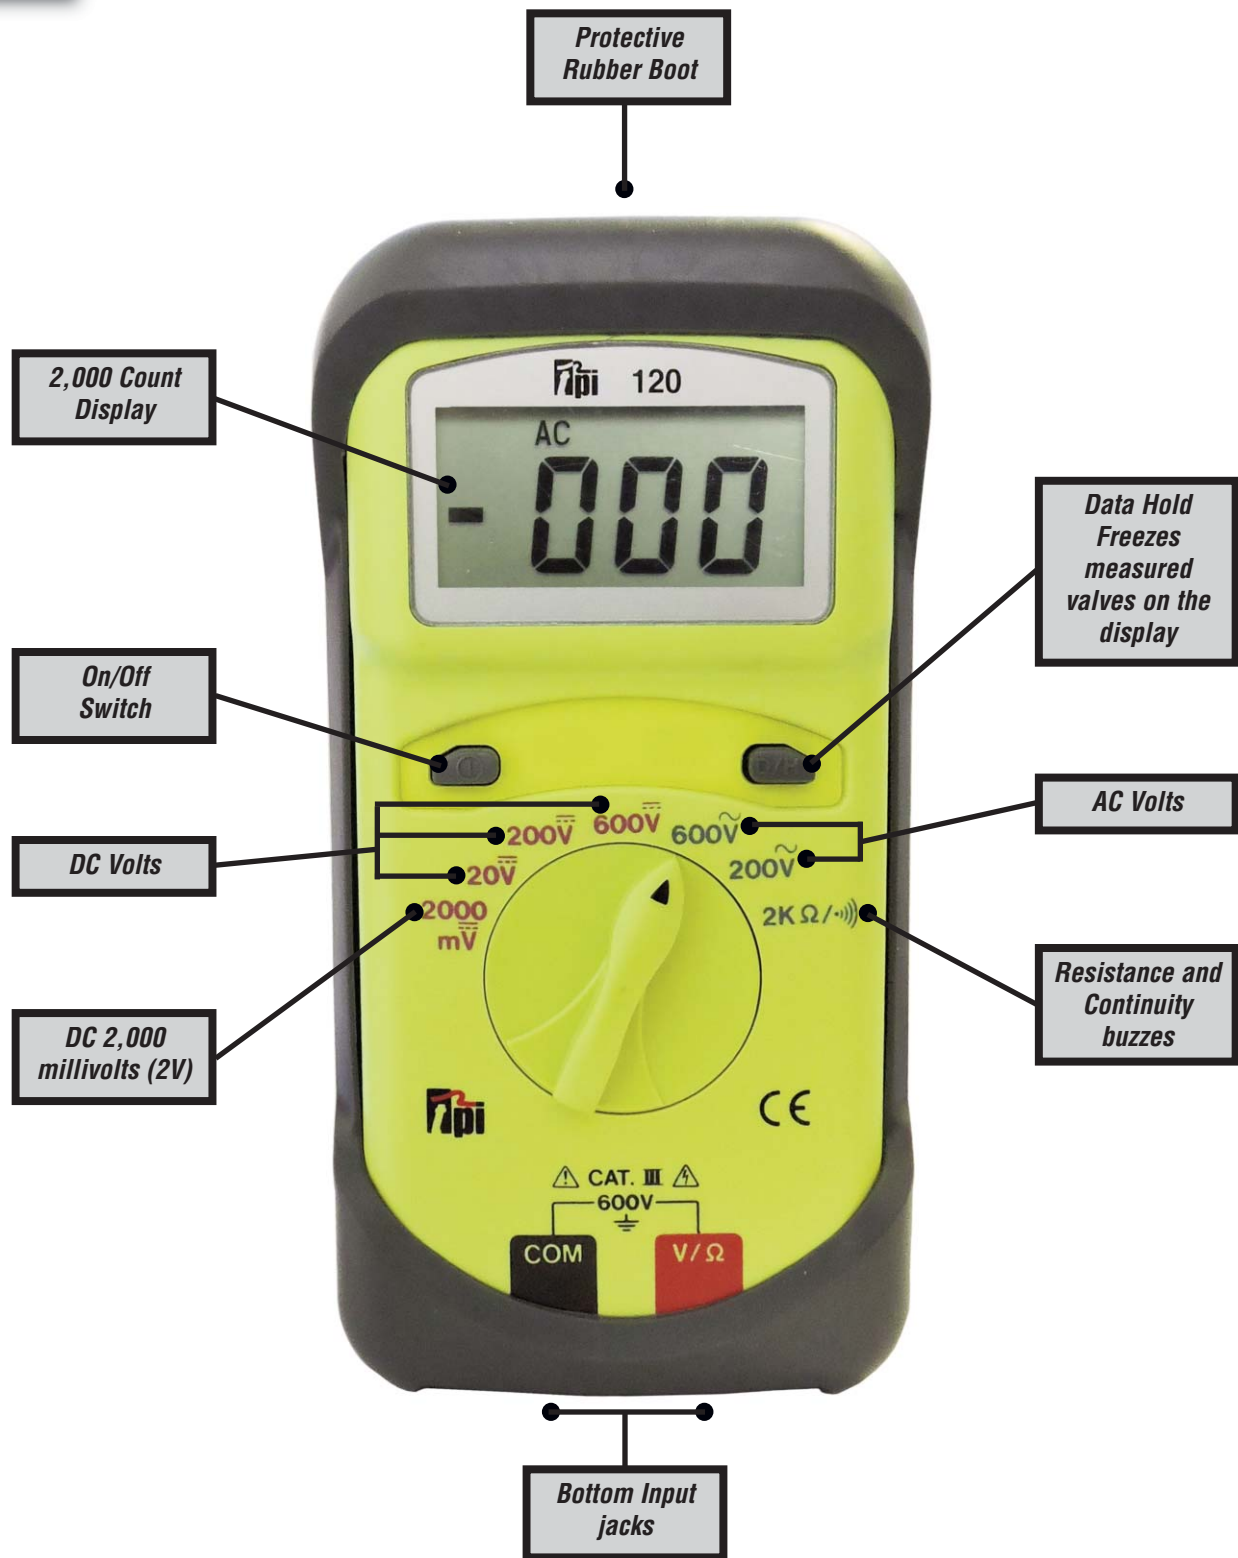

*Photo is actual size  
With Protective Boot  
1.3" x 3.4" x 7.4"  
(33mm x 86mm x 187mm)*