

739A
4 gas
Data Sheet
12.10

739A Measure Leaks, LEL, O2, CO and H2S

Test the TPI Advantage



Partial List of Industries:

USERS:

- Utilities
- Maintenance
- Fire Departments
- Safety Inspectors
- Home Inspectors
- Water/Sewer Departments
- Heating Contractors
- Utility Contractors
- Industrial Plants
- Propane Marketers

APPLICATIONS:

- Gas Leak Survey/Investigations
- Confined Space Monitoring
- Gas Emergency Investigations
- Vessel Testing



Designed to provide personal protection from potential hazardous conditions and help find the source of combustion gases fast!

PHYSICAL

PRODUCT SPECIFICATIONS

Size: 11.5" x 3" x 2.32" (292 x 76 x 69 mm)

Weight: 1.2 Lbs.

Operational Temp: 0 to 120° F

Storage Temp: -20 to 132° F

Battery Life: 3 "C" size alkaline batteries
- 16 Hrs. continuous

SENSOR


TYPE	RESOLUTION	RANGE	ACCURACY
Leak	N/A	0 -50,000ppm	N/A
LEL	0.1%	0-100%	±10%
O2	0.1%	0-25%	±0.2% or 2%*
CO	1ppm	0-2000ppm	±5ppm or 5%*
H2S	1ppm	0-100ppm	±1ppm or 5%*

* Whichever is greater

STANDARD FEATURES

- Internal Pump
- Water/Dust Filter
- Push Button Operation
- Field Calibration
- Date/Time Display
- Calibration Alert
- Operation Memory
- Calibration Memory
- Infrared Download
- Audible/Visual Alarms
- Backlit LCD
- Hard Carrying Case
- Programmable Auto Shut Off

www.tpi-thevalueleader.com

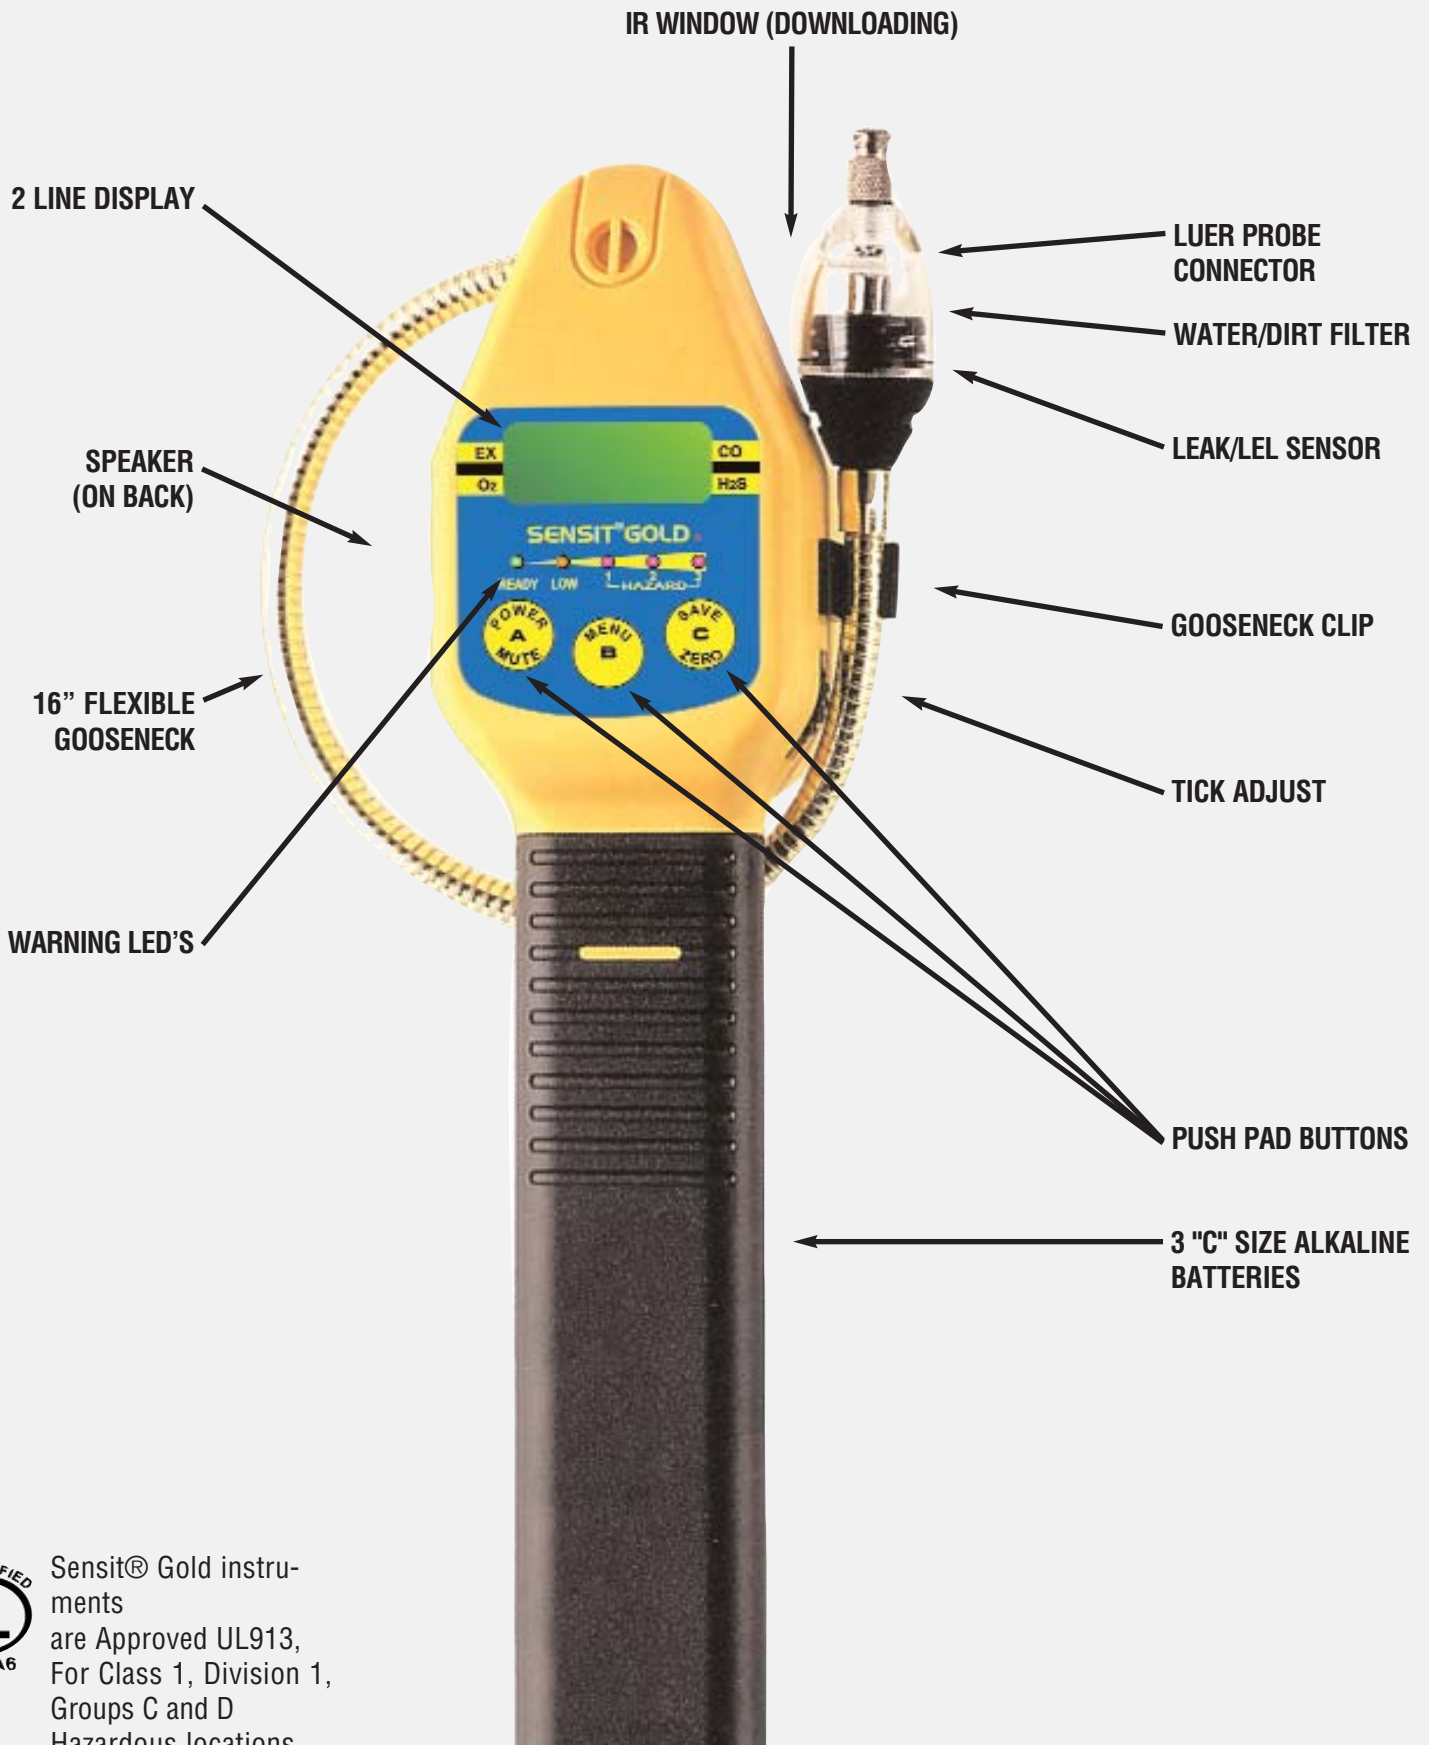

Sensit® Gold instruments are Approved UL913, For Class 1, Division 1, Groups C and D Hazardous locations when used with

Size: 11.5" x 3" x 2.32" (292 x 76 x 69 mm)
 Weight: 1.2 Lbs.